

AM

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification<sup>5</sup> : A61K 9/14, 9/52</p>	<p>A1</p>	<p>(11) International Publication Number: WO 94/23698 (43) International Publication Date: 27 October 1994 (27.10.94)</p>
<p>(21) International Application Number: PCT/US94/03710 (22) International Filing Date: 5 April 1994 (05.04.94) (30) Priority Data: 08/045,917 12 April 1993 (12.04.93) US 08/180,914 12 January 1994 (12.01.94) US (71) Applicant: CAMBRIDGE SCIENTIFIC, INC. [US/US]; 195 Common Street, Belmont, MA 02178 (US). (72) Inventors: WISE, Donald, L.; 195 Common Street, Belmont, MA 02178 (US). TRANTOLO, Debra, J.; 28 Radford Road, Princeton, MA 01541-1806 (US). GRESSER, Joseph, D.; 40 Salisbury Road, Brookline, MA 02146 (US). (74) Agents: SCHURGIN, Stanley, M. et al.; Weingarten, Schurgin, Gagnebin &amp; Hayes, Ten Post Office Square, Boston, MA 02109 (US).</p>		<p>(81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published With international search report. With amended claims.</p>

(54) Title: METHOD FOR MAKING A BIOERODIBLE MATERIAL FOR THE SUSTAINED RELEASE OF A MEDICAMENT AND THE MATERIAL MADE FROM THE METHOD

(57) Abstract

A method for making an implantable bioerodible material for the sustained release of a medicament and the material made from the method. The method comprises the formulation of a biomaterial polymeric carrier into particles of predetermined density and size. The particles are then mixed with the desired medicament and extruded into the desired shape for implantation or reground to a predetermined size distribution for injection as a suspension. In an alternative embodiment, the particles of polymeric carrier are immersed in a solvent containing a medicament, and the pores of the particles are filled with medicament through alternate application and release of vacuum. The invention is disclosed in a flowchart which outlines the steps of formulating the bioerodible material.

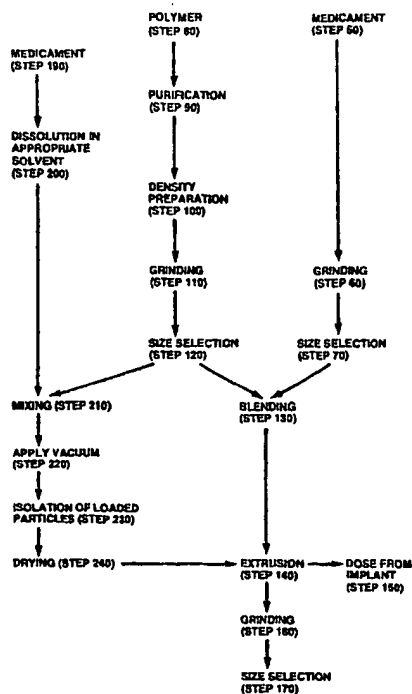

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MD	Republic of Moldova	TJ	Tajikistan
DE	Germany	MG	Madagascar	TT	Trinidad and Tobago
DK	Denmark	ML	Mali	UA	Ukraine
ES	Spain	MN	Mongolia	US	United States of America
FI	Finland			UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

5            METHOD FOR MAKING A BIOERODIBLE MATERIAL FOR THE SUSTAINED  
RELEASE OF A MEDICAMENT AND THE MATERIAL MADE FROM THE METHOD

RELATED APPLICATION

                  This application is a continuation-in-part of Serial  
No. 08/045,917 filed April 12, 1993 now abandoned.

10            FIELD OF THE INVENTION

                  The invention relates to the field of implantable  
biomaterials and more specifically to implantable  
biomaterials for the sustained release of medicaments.

BACKGROUND OF THE INVENTION

15            Many medicaments are most effective when administered  
continuously over an extended period of time. While it has  
been possible to administer some of these medicaments by way  
of an intravenous drip or by the serial administration of the  
20            medicament either orally or hypodermically, the requisite  
monitoring of an intravenous drip restricts this modality to  
a hospital or other care intensive facility and oral or  
hypodermic serial administration requires either repeated  
visits to a healthcare provider or a strict adherence to the  
25            regimen by the patient. Examples of strict regimen therapies  
include those for fertility control and tuberculosis  
treatment. However, since many of the patients under such  
treatment do not have adequate access to healthcare  
providers, it is desirable to have a treatment modality which  
30            will minimize the number of visits to a healthcare provider  
while not requiring active participation on the part of the  
patient. To meet these goals, research in the last few years  
has been directed toward creating implantable sustained  
release implants or particles which contain the desired  
medicaments.

35            These sustained release implants or particles take on  
many forms. Some implants or particles are made of  
bioerodible polymers which release entrapped medicaments as

- 2 -

the polymer is degraded within the body. In these devices, the rate of matrix erosion determines the rate at which the medicament is released. Other implants or particles consisting of a high porosity matrix rely on the time it takes a medicament located within the pores of the matrix to diffuse from the particle or implant.

Although sustained release implants or particles are being used in a number of different therapeutic regimens, a concern has recently arisen regarding the standard methods by which the particles or implants are fabricated. Typically polymers which form the implant or particle are dissolved in a solvent during the formation of the implant. Trace quantities of solvent may remain in the polymer during implant fabrication and patients receiving these implants or particles are exposed to the dangerous solvents which are released as the implant erodes.

The present invention relates to a solvent free method of producing bioerodible implants and particles for the administration of medicaments which permits the rate of release of the medicament to be controlled.

#### SUMMARY OF THE INVENTION

The invention relates to a method for making a bioerodible material for the sustained release of a medicament and the material made from the method. The method comprises adjusting the density of particles of a bioerodible material to a predetermined value and mixing the bioerodible material with the desired medicament. The resulting mixture is then extruded into forms suitable for implantation or ground into particles for such uses as inhalation delivery or hypodermic injection.

In one embodiment, the method of forming the implant comprises adjusting the density of the polymer by dissolving the erodible biomaterial in a solvent and the freeze drying of the resulting solution to form a film of bioerodible polymer of a predetermined porosity and density. The film

- 3 -

is then removed and cryogenically ground and sieved to retain particles of a predetermined size distribution. These particles are mixed with the desired medicament and the resulting mixture is then extruded into the desired shape for implantation.

In another embodiment the method of adjusting density comprises the dissolution of the erodible biomaterial in a solvent and the precipitation of the polymer in a liquid which is miscible with the polymer solvent but in which the polymer is insoluble.

In another embodiment, the method of mixing the desired medicament and the polymer particles includes immersing the particles in a solution of medicament in which the particles are not soluble. Application of vacuum to the mixture to remove air permits the pores of the particles to be substantially completely loaded with the medicament when the vacuum is released thus forcing the solution into the pores. Subsequent freeze drying removes the solvent while retaining the medicament within the pores.

In yet another embodiment the resulting extruded bioerodible material may be reground into particles suitable for inhalation delivery or hypodermic injection.

#### BRIEF DESCRIPTION OF THE DRAWING

These and further features of the invention will be better understood with reference to the preferred embodiments and the drawing in which:

Fig. 1 is a flowchart disclosing the steps of formulating a bioerodible material of the invention;

Fig. 2 is a set of graphs depicting the relationship of the release rate of a medicament as a function of time for implants made from various ranges of particle size of polymer;

Fig. 3 is a set of graphs depicting the relationship of the release rate of a medicament as a function of time for implants made at different extrusion pressures;

- 4 -

Fig. 4 is a graph of the natural logarithm of extrusion pressure versus inverse temperature; and

Fig. 5 is a set of graphs depicting the relationship of the release rate of a medicament as a function of time for implants made according to the embodiment of the method of  
5 the invention depicted in Fig. 1.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Fig. 1, an embodiment of a method of the invention for the formulation of a medicament in a bioerodible material is depicted as a flowchart.  
10

The medicament which is to be used is received from the manufacturer (50) and is ground (60) until the drug particles have been reduced to a substantially homogeneous predetermined size. The drug particles are then  
15 separated (70) according to size, for example by standard sieving, and a predetermined drug particle size (typically 5-15 microns) selected for use.

The polymer, as received from the manufacturer (80) is purified (90) to remove unreacted monomers, low molecular weight polymer and debris (such as the catalyst used in the polymer synthesis). The purification method is determined  
20 by the polymer being used and purification may not be necessary with sufficiently pure polymers.

In an exemplary embodiment, for example, to purify the polymer poly(lactide-co-glycolide) or poly(lactic-co-glycolic acid) (PLGA) so as to remove any residual lactide, glycolide or short chain oligomers, the technique referred to as solvent insolubility may be used. This technique requires dissolving the polymer in a first solvent and mixing the  
25 resulting solution with a second solvent in which the polymer is insoluble but with which the first solvent is miscible. As the polymer precipitates out of solution, it is collected (for example on a stirring rod), air dried, and then vacuum  
30 dried.

- 5 -

The purified polymer is then processed to achieve a predetermined density (100). In one embodiment, the density of the polymer is adjusted by the technique of solvent insolubility discussed above. In another embodiment, density adjustment is performed by dissolving the purified polymer in a solvent and vacuum drying or lyophilizing the resulting solution. By varying the ratio of polymer to solvent, the density of the resulting dried polymer may be varied.

It should be noted that although polymer purification and density adjustment are described as separate steps in this embodiment, another embodiment is possible in which the step polymer purification by the technique of solvent insolubility as described above is used for controlling polymer density. If further reduction of densities is required an additional density adjustment step may be performed.

The resulting polymer of the required density is cryogenically ground (110) until the polymer particles have been reduced to a substantially homogeneous predetermined size. The cryogenic cooling makes the polymer brittle and therefore easily ground to a predetermined size of particle. The polymer particles are then separated (120) according to size, for example by sieving, and a predetermined polymer particle size selected for use. The particles typically range in size from  $<10 \mu\text{m}$  to approximately  $200 \mu\text{m}$  and different particle sizes are suitable for different applications. As is depicted in Fig. 2 (for the drug isoniazid in the polymer PLGA), the smaller the polymer particle size, the more rapid is the release of medicament.

The selected polymer particles and selected drug particles are dry blended (130) together to homogeneity at a predetermined ratio of drug to polymer.

In an alternative embodiment, medicament may be loaded into the pores of the polymer particles using a vacuum. In an exemplary embodiment illustrated in Fig. 1, a medicament (190) may be dissolved in an appropriate

- 6 -

solvent (200). Preferably, the solvent will be water in which the polymer is insoluble. However, other solvents, such as ethanol, which will dissolve the medicament but not the polymer, may also be used. The chosen solvent must be capable of completely dissolving the medicament, but must not dissolve or substantially affect the polymer particles or their pore structure morphology.

Polymer particles prepared as described above (120) are added to the medicament solution and mixed (210). To ensure that the voids in the polymer particles are completely filled, vacuum is applied to the mixture (220) to remove trapped air from the particles. Several applications of vacuum of approximately 10-50 Torr may be necessary to completely remove all the air trapped within the porous structure of the polymer particles. The loaded particles are then isolated from the bulk medicament solution (230) by filtration or decanting to remove any excess solution, and then freeze dried or vacuum dried (240) to remove solvent from within the pores.

The blended mixture from either step 130 or 240 is then placed in an extrusion device and extruded (140) into a rod. In one embodiment the extrusion device is a high pressure ram extruder which has a controllable extrusion temperature. As illustrated in Fig. 1, the resulting extruded rod may then be used as an implant (150).

As shown in Fig. 3 (for the drug isoniazid in the polymer PLGA), the higher the pressure of extrusion, the slower the release of medicament. The initial release rates (expressed as the slopes of the linear portion of the release profiles) diminish with increasing pressure and approach a limiting value at high pressure. Therefore, one skilled in the art may modify and control release rates by adjusting the extrusion pressure.

It should be noted that higher pressures and especially lower temperatures are also suitable and that for the extrusion of a biological, temperatures less than 37°C may



- 7 -

be desired. This is because the application of pressure generates heat which may be especially detrimental to biologicals. Thus it is possible to cool the polymer/medicament mixture to avoid the problems of heat generation provided that the extruder used is capable of generating the pressures necessary to extrude the cooled mixture. A correlation between the pressure required for extrusion and temperature of the mixture is found to follow a  $\ln(P)$  versus  $1/T$  ( $^{\circ}K$ ) relationship (Fig. 4), with the various constants depending on such variables as polymer molecular weight, medicament molecular weight, lactide to glycolide ratio, ratio of medicament to polymer, etc.

The relationship between pressure and temperature may be expressed as:

$$\ln P = \ln(8lv/r^2) + \ln A + (\Delta E_v/R)T^{-1}$$

where  $l$  is the length of the tube extruded,  $v$  is the linear flow velocity,  $r$  is the tube radius,  $A$  is a preexponential constant,  $\Delta E_v$  is the activation energy for viscous flow, and  $R$  is the universal gas constant. Thus, lower extrusion temperatures may be permitted by a corresponding increase in pressure.

In an embodiment which is an alternative to rod implantation, shown in Fig. 1, the extruded rod is then ground (160) and a predetermined particle size selected (170) for use as a powder (180), for example for inhalation use or hypodermic injection. In such an embodiment, the final particle size for injection or inhalation determines, to some extent, the initial particle size prior to extrusion. This is because, in order to obtain particles which all have the same ratio of medicament to polymer, it is necessary to use polymer and medicament particles for extrusion which are smaller than the final particle size desired.

For example, if it is desired to inject a sustained release tetanus toxoid into a newborn infant through a 25 gauge hypodermic needle, it is necessary that the particle

- 8 -

size being injected be less than  $10\mu$ . For this size particle to have a consistent ratio of polymer to toxoid, it is necessary to grind the toxoid to about  $1\mu$  and blend it with PLGA particles which are less than  $10\mu$ . This mixture, when  
5 extruded into a rod at an extrusion temperature of  $37^{\circ}\text{C}$  or less and again cryogenically ground to less than  $10\mu$ , will produce  $10\mu$  particles which are uniform in their ratio of polymer to toxoid. Conversely, if the tetanus toxoid  
10 particle is for injection into an adult (typically using an 18 gauge hypodermic needle) a final particle size of  $50\text{-}125\mu$  is acceptable with a corresponding increase in toxoid and polymer particle size possible.

#### EXAMPLE OF RELEASE OF A DRUG

One proposed use for a bioerodible implant produced by  
15 the method of the invention is for the treatment of tuberculosis with the drug isoniazid (isonicotinic acid hydrazide) in a bioerodible matrix of poly-(lactic-co-glycolic-acid), a copolymer of lactic and glycolic acids at a ratio of 75:25 (PLGA-75:25). The treatment of tuberculosis  
20 with this drug is especially suitable for use in a bioerodible implant. This is because the drug's regimen typically consists of the ingestion of daily doses of between 500 and 1000 mg of the drug for a period of three to six months. Thus a sustained release method of dispensing this  
25 drug would reduce the risk that the patient would not complete the entire course of treatment. In the following description of an embodiment of the method of formulating an implant for the release of a drug, the drug isoniazid in PLGA-75:25 is used for exemplary purposes, but other drugs  
30 and polymers may be used with the method as described.

Isoniazid as received from the manufacturer is ground in a ball mill containing ceramic balls until the drug crystals have been reduced to a substantially homogeneous size of between 5 and 10 microns.

- 9 -

The PLGA is purified by slowly adding a volume of a solution of the polymer PLGA dissolved in methylene chloride, tetrahydrofuran or, preferably, acetone at about 5% weight to volume of polymer to about 20 volumes of isopropanol under continuous stirring. The purified polymer, which precipitates from the isopropanol, is recovered on a stirring rod, as a fibrous, porous, "cocoon" which is then air dried to remove any solvent. Although typically less than 15 ppm solvent remains after air drying, this residual solvent is then reduced by vacuum drying to less than 5 ppm.

To adjust the density of PLGA, the solid polymer of PLGA-75:25 having a density of  $1.22 \text{ gm/cm}^3$  is dissolved in the solvent such as methylene chloride, tetrahydrofuran, or, preferably, acetone. Since the ratio of the amount of solid polymer to solvent determines the final density of the polymer upon reconstitution, in order to obtain two different final polymer densities of about  $0.8 \text{ gm/cm}^3$  and about  $0.5 \text{ gm/cm}^3$ , 7 gms and 3.5 gms of PLGA-75:25 are dissolved respectively in 70 ml of methylene chloride, or acetone. Each of the resulting solutions are respectively placed in a rotary-vacuum apparatus (such as a BUCHI Rotorvapor®, BUCHI Laboratoriums-Technik AG, Flawil Schweiz, Switzerland) refrigerated by dry ice and vacuum dried into a film. Each of the resulting films are then further dried in a desiccator for between one and two days, after which time substantially none of the solvent methylene chloride remains.

Each of the different density individual polymer films is then cryogenically ground, for example in a TEKMAR A-10 Analytical Mill (manufactured by the Tekmar Co., Cincinnati, Ohio) with a C-10 adaptor containing liquid nitrogen and sieved to isolate particles of the size 45-90 microns.

Each of the ground polymer particles of different densities is respectively mixed with the prepared isoniazid particles to form mixtures which are, for example, 25% by weight isoniazid. Each of the mixtures of different densities PLGA and isoniazid is respectively extruded in a

- 10 -

ram extruder (for example a Compac Type MPC 40-1 extruder made by Stenhoj Co., Denmark) at 40,000 psi at between 70°C and 74°C into a form suitable for implantation.

5 The result of an *in vitro* measurement of the release of isoniazid as a function of time can be seen in Fig. 5. Fig. 5 demonstrates that the rate of release of isoniazid depends upon the density of the polymer particles from which the implant is extruded and hence control of the polymer particle density may be used to control the rate at which the  
10 drug is dispensed.

The technique of dry-blending polymer and medicament without the use of a solvent in which to dissolve the polymer may be used in conjunction with control of the polymer particle size to achieve control of release rates. Polymer  
15 in the form of extrudate received from the supplier or in the form of purified fibrous precipitate, or prepared as foam may be ground and sieved to retain specific particle size ranges. These may then be blended with micron-sized medicament in a rotary blender, or by any means capable of achieving a  
20 homogeneous mixture. In the blending process both polymer and medicament may be mixed as dry powders.

Polymer as received from the supplier was directly ground without first preparing a foam. The polymer, a PLGA-75:25, was ground at liquid nitrogen temperatures using a  
25 Tekmar A-10 mill equipped with a liquid nitrogen reservoir. The ground polymer was sieved through a series of Taylor screens (45, 90, 125, and 180 microns) and the following particle size ranges were isolated: <45, 45-90, and 125-180 microns. The isoniazid (INH) medicament was ground to  
30 a maximum particle size of 20 microns with 75% of the particles in the range 5-10 microns. The ground polymer fractions were blended with the dry micronized INH powder to form mixtures containing 25% by weight of INH. The blend was extruded as described previously at 40,000 psi through a  
35 1.0 mm diameter cylindrical die in the temperature range 68-82°C, depending on the polymer particle size. The extruded

- 11 -

rods were cut into convenient size for in vitro measurement of release.

5 Release of INH from the extruded matrices described above was measured in phosphate buffered saline (PBS) at 37°C. Fig. 2 shows release profiles for the matrices formed from the 3 PLGA size ranges. Thus, it is seen that release rates may be altered by a factor of greater than two-fold by reduction of the polymer particle size from 125-180 microns to less than 45 microns.

10 In an alternative embodiment, the medicament may be loaded into the polymer particles by preparing a slurry of polymer particles in a solution of medicament and applying a vacuum to fill the voids of the particles. This result may be accomplished by dissolving the drug without dissolving or causing swelling or other morphological changes in the polymer. Preferably, the solvent should have a high vapor pressure so that it may easily be removed by volatilization or sublimation. The drug solution is then added to the foam, which itself may be ground to a particular particle size range, to form a slurry. In order to force the drug into the pore structure, the slurry is degassed, either as a liquid/solid mixture or after freezing. This process effectively removes air from the pores. After degassing, the slurry, if frozen, is thawed so that the drug solvent melts and air, or any other suitable gas, is allowed to enter the system at any desired pressure. The gas pressure forces the drug solution into the pores. The mixture is then re-frozen and the solvent is then removed by lyophilization, a process which traps the drug within the pores.

25 30 In one embodiment illustrating the control of polymer foam density, PLGA-85:15 was dissolved in benzene to form solutions of concentrations 50, 100, and 200 mg/ml. After freeze drying, bulk densities were measured yielding values of 0.11, 0.17, and 0.27 grams/cm<sup>3</sup> respectively.

35 In a second embodiment, low bulk density foam was loaded with the narcotic antagonist naltrexone. Porous PLGA-85:15

- 12 -

was prepared by freeze drying a benzene solution containing 132 mg/ml of the polymer. The resulting bulk density was 0.24 gr/cm<sup>3</sup>. Samples were then immersed in solutions of naltrexone in methanol containing either 0.12 or 0.25 gr/cm<sup>3</sup>, and degassed several times as described to force the solution into the porous polymer. After evaporating the methanol, the weight fraction of naltrexone was determined gravimetrically and compared to expected values calculated as shown below. Results were as follows:

10	Concentration of naltrexone (gr/cm <sup>3</sup> ):	0.12	0.25
	PLGA-85:15 density (gr/cm <sup>3</sup> )	0.26	0.24
	% naltrexone in foam (experimental)	29.1	57.1
	% naltrexone in foam (calculated)	26.9	45.5

The weight fraction of medicament loaded into the pores of the polymer particles may be calculated using the following equation:

$$f = \left[ 1 + \frac{d_b d_m}{C(d_m - d_b)} \right]^{-1}$$

where  $f$  = the weight fraction of medicament in the polymer particle foam;

$C$  = the concentration of medicament in the solution;

$d_b$  = the bulk density of the polymer particle foam; and

$d_m$  = the absolute density of the polymer.

The bulk density of the foam ( $d_b$ ) is defined as the weight of the foam per overall unit volume and includes all void volume incorporated within the unit volume. The absolute density of the polymer ( $d_m$ ) is the weight of the polymer per unit volume. Thus, the difference between the two values represents the volume of the void which becomes

- 13 -

filled with the medicament solution. The assumptions upon which this calculation is based are that the void volume is completely occupied by the medicament solution, no change in volume occurs on exposure of the foam to the medicament solution, and that all medicament is trapped within the foam by lyophilization.

This method of loading medicament into the polymer particles provides several advantages. The method is especially useful in that foams of any desired density may be produced in advance and stored until needed. In addition, the user may specify a desired weight fraction of medicament in the polymer, and calculate the bulk or absolute foam densities that will be required to load a given solution of medicament. The method is compatible with any water- or ethanol-soluble medicament, or with any solvent in which the medicament is soluble, but which leaves the polymer substantially unchanged. The method requires that an excess of medicament solution be used, but excess medicament which is not entrapped in the foam may be recovered by lyophilization and reused.

#### EXAMPLE OF RELEASE OF A BIOLOGICAL

Another proposed use for a bioerodible implant produced by the method of the invention is for the treatment of advanced adenocarcinoma of the prostate with analogs of the biological LHRH (Luteinizing Hormone-Releasing Hormone) again in a bioerodible matrix of PLGA-75:25. The treatment of advanced prostate cancer with LHRH reduces the level of the hormone testosterone which in turn has a palliative effect on the disease. Presently a reduction in testosterone level may be brought about by implantation of conventional solvent based microcapsulation or matrix formulation of LHRH analogs or other drugs, or by the surgical technique of bilateral orchiectomy.

The treatment of advanced prostate cancer with LHRH in a bioerodible implant is especially desirable because it

- 14 -

avoids the psychological ramifications attendant with an orchiectomy. In the following description of an embodiment of the method of formulating an implant with a biological, the LHRH analog, (des-gly<sup>10</sup>)-(D-Trp<sup>6</sup>,Pro<sup>9</sup>)-LHRH ethylamide (LNRH-An), in PLGA-75:25 is used for exemplary purposes, but other biologicals and polymers may be used with the method as described.

In this embodiment, the LHRH-An is used as received from the manufacturer without purification. The LHRH-An was ground in a mortar with pestle until, as verified by microscopic analysis, all particles were less than 20 $\mu$ , with the large majority being between 5-15 microns.

For the purposes of this example, two PLGA's, having lactide to glycolide ratios of 90:10 and 75:25, are used. Each polymer is purified, using the technique of solvent insolubility discussed above, by dissolving the polymer as received from the manufacturer in acetone to form a solution at a concentration of 0.05 grams/ml. One volume of this solution is slowly added with stirring to about ten volumes of isopropanol. The purified polymer "cocoon" which form are on dried for one day and then vacuum dried over desiccant for two to seven days. This purification step is sufficient to reduce the specific gravity of each of the polymers from 1.33 to 1.19 and the purified polymers are then used in this example with no further reduction in density.

Each adjusted density purified polymer is cryogenically ground for 6-10 minutes at 20,000 rpm in a TEKMAR A-10 Analytical Mill (manufactured by the Tekmar Co., Cincinnati, Ohio) with a C-10 adapter containing liquid nitrogen. Alternatively the same result may be achieved by water cooling the mill and grinding the polymer in pulses of 30 seconds to one minute, with intervening intervals of 5-10 minutes allowed for cooling the polymer. The ground polymers were then sieved to isolate particles of the size 45-90 microns.



- 15 -

The ground polymer particles are milled together with LHRH-An particles for 24 hours without grinding agents to insure efficient blending without further particle size reduction. The ratio of LHRH-An to polymer is such as to form a 2.9% by weight mixture. The mixture is extruded using a Compac type MPC 40-1 hydraulic press which maintains a constant temperature by means of external heating tapes on the mold and constant pressure control on the drug/polymer mixture. Extrusions are performed at 68-71 degree C at 16,800 psi to yield extruded cylindrical forms suitable for implantation. The extruded cylinders are then reground and sieved to isolate the following size range 45-90, 90-125 and 125-180 microns, suitable for injection.

*In vitro* release studies indicate a dependence of rates of release on polymer composition, but relatively little dependent on matrix particle size. Release rates, computed from the linear portion of the cumulative fraction release versus time curves, for the six formulations are shown in Table 1.

*In vivo* tests were conducted to determine the efficacy of these formulations in reducing serum testosterone. In these tests, Sprague-Dawley rats (mean weight 380± 9g.) each received a subcutaneous injection of 102 mg of ground matrix to deliver a mean dose of 3.0 mg of LHRH-An (7.8 mg/kg). The serum testosterone levels as measured by radioimmunoassay fell from a mean of 3.58±1.26 ng/ml for controls to 0.79±0.29 ng/ml for all experimental groups for the time period of day 6 to day 124 post injection. This represents a significant reduction in testosterone levels of 77.9%.

Still another proposed use for a bioerodible implant produced by the method of the invention is for treatment cancer and AIDS with the T-cell growth factor Interleukin-2 (IL-2). Although Interleukin-2 is an extremely heat-labile molecule, the controlled pressure and temperature method of the invention permits the fabrication of a bioerodible rod containing IL-2 such that functional IL-2 is

- 16 -

released from the implanted rod over a period of eleven days. Thus the method of the invention may not only be used with drugs or smaller biologicals, but it can also be used with biologicals whose exposure to the heat generated by the pressure applied during rod fabrication would otherwise be damaging.

5

Having showed the preferred embodiments, those skilled in the art will realize many variations are possible which will still be within the spirit and scope of the claimed invention. Therefore, it is the intention to limit the invention only as indicated by the scope of the claims.

10

RELEASE RATE VERSUS PARTICLE SIZE AND POLYMER COMPOSITION

	<u>Matrix Particle size, micron</u>	<u>Polymer composition</u>	<u>Release rate hr<sup>-1</sup></u>
5	45- 90	75:25	0.0015
	90-125	75:25	0.0013
	125-180	75:25	0.0014
10	45- 90	90:10	0.25
	90-125	90:10	0.27
	125-180	90:10	0.19

TABLE 1

CLAIMS

We claim:

1. A method for forming a bioerodible sustained time release particle for the continuous release of a medicament,  
5 said method comprising the steps of:  
selecting a medicament for use;  
selecting a bioerodible polymer for use;  
adjusting the density of the bioerodible polymer;  
10 processing the density adjusted bioerodible polymer to form particles of a predetermined size;  
blending the medicament and the processed density-adjusted bioerodible polymer; and  
extruding the blend of medicament and processed density-adjusted bioerodible polymer into a rod using a predetermined  
15 temperature and pressure.
2. The method of claim 1 wherein said medicament is a drug.
3. The method of claim 1 wherein said medicament is a biological.
4. The method of claim 3 wherein said temperature is less  
20 than 37 degrees centigrade.
5. The method of claim 1 wherein said step of adjusting the density of the bioerodible polymer comprises the steps of:  
dissolving the bioerodible polymer in a solvent in a ratio sufficient to produce a desired density when the  
25 polymer is reconstituted; and  
evaporating the solvent to recover the reconstituted polymer.
6. The method of claim 5 wherein the step of evaporating the solvent to recover the reconstituted polymer comprises  
30 the step of vacuum drying.

7. The method of claim 1 wherein prior to the step of adjusting the density of the bioerodible polymer, said polymer is purified.

5 8. The method of claim 1 wherein said step of processing the density adjusted bioerodible polymer to form particles of a predetermined size comprises the step of grinding and separating the particles of polymer into predetermined sizes.

9. The method of claim 8 wherein the step of separating the particles of polymer comprises the step of sieving.

10 10. The method of claim 1 wherein subsequent to said extrusion said rod is ground to particles of a predetermined size.

15 11. A method for forming a biodegradable matrix suitable for use in a sustained time release particle, said method comprising the steps of:

selecting a bioerodible polymer for use;

adjusting the density of the bioerodible polymer;

processing the density adjusted bioerodible polymer to form particles of a predetermined size;

20 blending a medicament and the processed density-adjusted bioerodible polymer; and

extruding the blend of medicament and processed density-adjusted bioerodible polymer into a rod at a predetermined temperature and pressure.

25 12. A sustained time release particle for the release of a medicament made by a method comprising the steps of:

selecting a medicament for use;

selecting a bioerodible polymer for use;

adjusting the density of the bioerodible polymer;

30 processing the density adjusted bioerodible polymer to form particles of a predetermined size;

blending the medicament and the processed density-adjusted bioerodible polymer; and

extruding the blend of medicament and processed density-adjusted bioerodible polymer into a rod at a predetermined temperature and pressure.

5

13. A method for forming a bioerodible sustained time release particle for the continuous release of a medicament, said method comprising the steps of:

selecting a medicament for use;

10

selecting a bioerodible polymer for use;

adjusting the density of the bioerodible polymer;

processing the density adjusted bioerodible polymer to form particles of a predetermined size;

15

dissolving said medicament in a solvent to produce a medicament solution, said solvent not capable of substantially changing said processed density-adjusted bioerodible polymer;

mixing said medicament solution and said processed density-adjusted bioerodible polymer to produce a medicament-loaded processed density adjusted bioerodible polymer;

20

isolating said medicament-loaded processed density adjusted bioerodible polymer; and

extruding said medicament-loaded processed density adjusted bioerodible polymer into a rod using a predetermined temperature and pressure.

25

14. The method of claim 13 wherein said medicament is a drug.

15. The method of claim 13 wherein said medicament is a biological.

30

16. The method of claim 15 wherein said temperature is less than 37 degrees centigrade.

17. The method of claim 13 wherein said step of adjusting the density of the bioerodible polymer comprises the steps of:

5 dissolving the bioerodible polymer in a solvent in a ratio sufficient to produce a desired density when the polymer is reconstituted; and

removing the solvent to recover the reconstituted polymer.

10 18. The method of claim 17, wherein the step of removing the solvent to recover the reconstituted polymer comprises the step of vacuum drying.

19. The method of claim 17, wherein the step of removing the solvent to recover the reconstituted polymer comprises the step of freeze drying.

15 20. The method of claim 13 wherein prior to the step of adjusting the density of the bioerodible polymer, said polymer is purified.

20 21. The method of claim 13 wherein said step of processing the density adjusted bioerodible polymer to form particles of a predetermined size comprises the step of grinding and separating the particles of polymer into predetermined sizes.

22. The method of claim 21 wherein the step of separating the particles of polymer comprises the step of sieving.

25 23. The method of claim 13 wherein subsequent to said extrusion said rod is ground to particles of a predetermined size.

24. The method of claim 13, wherein said mixing step includes application of a vacuum.

25. The method of claim 13, wherein said solvent is water.

26. The method of claim 13, wherein said solvent is ethanol.

27. A bioerodible sustained time release particle for the continuous release of a medicament formed from a method comprising the steps of:

5           selecting a medicament for use;  
          selecting a bioerodible polymer for use;  
          adjusting the density of the bioerodible polymer;  
          processing the density adjusted bioerodible polymer to  
form particles of a predetermined size;

10           dissolving said medicament in a solvent to produce a  
medicament solution, said solvent not capable of  
substantially changing said processed density-adjusted  
bioerodible polymer;

15           mixing said medicament solution and said processed  
density-adjusted bioerodible polymer to produce a medicament-  
loaded processed density adjusted bioerodible polymer;

          isolating said medicament-loaded processed density  
adjusted bioerodible polymer; and

20           extruding said medicament-loaded processed density  
adjusted bioerodible polymer into a rod using a predetermined  
temperature and pressure.



## AMENDED CLAIMS

[received by the International Bureau on 27 September 1994 (27.09.94);  
original claims 1,4,11-13,16,22 and 27 amended;  
original claims 18,19,21 and 24-26 cancelled;  
remaining claims unchanged but renumbered; new claims 22-32 added (6 pages)]

- 5           1. A method for forming a bioerodible sustained time  
release particle for the continuous release of a medicament,  
said method comprising the steps of:  
          selecting a medicament for use;  
          selecting a bioerodible polymer for use;  
10           adjusting the density of the bioerodible polymer;  
          grinding and sorting the density adjusted bioerodible  
polymer to select density adjusted bioerodible polymer  
particles of a predetermined size, said particles having  
pores;  
15           dissolving the medicament in a solvent in which the  
bioerodible polymer is not soluble to form a medicament  
solution;  
          mixing the selected density adjusted bioerodible polymer  
particles into said solution of the medicament;  
20           applying a vacuum to the suspension of said solution of  
medicament and density adjusted bioerodible polymer particles  
to remove air from said pores of said density adjusted  
bioerodible polymer;  
          releasing said vacuum to load said solution of  
25           medicament into said particles; and  
          isolating the density adjusted bioerodible polymer  
particles which are loaded with said medicament.
2. The method of claim 1 wherein said medicament is a drug.
3. The method of claim 1 wherein said medicament is a  
30           biological.
4. The method of claim 1 wherein said steps take place at  
a temperature of less than 37 degrees centigrade.
5. The method of claim 1 wherein said step of adjusting the  
density of the bioerodible polymer comprises the steps of:

dissolving the bioerodible polymer in a solvent in a ratio sufficient to produce a desired density when the polymer is reconstituted; and

5 evaporating the solvent to recover the reconstituted polymer.

6. The method of claim 5 wherein the step of evaporating the solvent to recover the reconstituted polymer comprises the step of vacuum drying.

10 7. The method of claim 1 wherein prior to the step of adjusting the density of the bioerodible polymer, said polymer is purified.

15 8. The method of claim 1 wherein said step of processing the density adjusted bioerodible polymer to form particles of a predetermined size comprises the step of grinding and separating the particles of polymer into predetermined sizes.

9. The method of claim 8 wherein the step of separating the particles of polymer comprises the step of sieving.

20 10. The method of claim 32 wherein subsequent to said extrusion said rod is ground to particles of a predetermined size.

11. A method for forming a biodegradable matrix suitable for use in a sustained time release particle, said method comprising the steps of:

25 selecting a bioerodible polymer for use;  
adjusting the density of the bioerodible polymer; and  
grinding and sorting the density adjusted bioerodible polymer to select density adjusted bioerodible polymer particles of a predetermined size.

12. A sustained time release particle for the release of a medicament made by a method comprising the steps of:

selecting a medicament for use;

selecting a bioerodible polymer for use;

5 adjusting the density of the bioerodible polymer;

grinding and sorting the density adjusted bioerodible polymer to select density adjusted bioerodible polymer particles of a predetermined size, said particles having pores;

10 dissolving the medicament in a solvent in which the bioerodible polymer is not soluble to form a medicament solution;

mixing the selected density adjusted bioerodible polymer particles into said solution of the medicament;

15 applying a vacuum to the suspension of said solution of medicament and density adjusted bioerodible polymer particles to remove air from said pores of said density adjusted bioerodible polymer;

20 releasing said vacuum to load said solution of medicament into said particles; and

isolating the density adjusted bioerodible polymer particles which are loaded with said medicament.

13. A method for forming a bioerodible sustained time release material for the continuous release of a medicament, said method comprising the steps of:

25 selecting a medicament in solid form for use;

selecting a bioerodible polymer for use;

adjusting the density of the bioerodible polymer;

30 grinding and sorting the density adjusted bioerodible polymer to select density adjusted bioerodible polymer particles of a predetermined size;

mixing said medicament in solid form and said selected density adjusted bioerodible polymer particles; and

extruding said mixture of medicament-loaded selected density adjusted bioerodible polymer into a rod using a predetermined temperature and pressure.

- 5 14. The method of claim 13 wherein said medicament is a drug.
- 15 15. The method of claim 13 wherein said medicament is a biological.
- 16 16. The method of claim 13 wherein said steps take place at a temperature of less than 37 degrees centigrade.
- 10 17. The method of claim 13 wherein said step of adjusting the density of the bioerodible polymer comprises the steps of:
- 15       dissolving the bioerodible polymer in a solvent in a ratio sufficient to produce a desired density when the polymer is reconstituted; and
- removing the solvent to recover the reconstituted polymer.
- 20 18. The method of claim 13 wherein prior to the step of adjusting the density of the bioerodible polymer, said polymer is purified.
19. The method of claim 13 wherein the step of grinding and sorting the particles of polymer comprises the step of sieving.
- 25 20. The method of claim 13 wherein subsequent to said extrusion said rod is ground to particles of a predetermined size.

21. A bioerodible sustained time release material for the continuous release of a medicament formed from a method comprising the steps of:

selecting a medicament in solid form for use;

5 selecting a bioerodible polymer for use;

adjusting the density of the bioerodible polymer;

grinding and sorting the density adjusted bioerodible polymer to select density adjusted bioerodible polymer particles of a predetermined size;

10 mixing said medicament in solid form and said selected density adjusted bioerodible polymer to produce a medicament-loaded selected density adjusted bioerodible polymer; and

extruding said mixture of medicament-loaded selected density adjusted bioerodible polymer into a rod using a predetermined temperature and pressure.

22. The method of claim 5, wherein said density adjustment step produces a bioerodible polymer with density of from approximately 0.5 to approximately 0.8 g/cm<sup>3</sup>

20 23. The method of claim 22 wherein said density adjustment step includes producing a solution of from approximately 0.05 to approximately 0.1 grams PLGA per milliliter solvent.

24. The method of claim 22, wherein said density adjustment step produces a bioerodible polymer with density of approximately 0.5 g/cm<sup>3</sup>

25 25. The method of claim 22, wherein said density adjustment step produces a bioerodible polymer with density of approximately 0.8 g/cm<sup>3</sup>

26. The method of claim 17, wherein said density adjustment step produces a bioerodible polymer with density of from approximately 0.5 to approximately 0.8 g/cm<sup>3</sup>

27. The method of claim 26 including wherein said density adjustment step includes producing a solution of from approximately 0.05 to approximately 0.1 grams PLGA per milliliter solvent.

5 28. The method of claim 26, wherein said density adjustment step produces a bioerodible polymer with density of approximately 0.5 g/cm<sup>3</sup>

29. The method of claim 26, wherein said density adjustment step produces a bioerodible polymer with density of  
10 approximately 0.8 g/cm<sup>3</sup>

30. The method of claim 11, wherein said density adjustment step further includes the steps of:

dissolving said bioerodible polymer in a solvent to form a polymer solution; and

15 freeze drying said polymer solution to form a film of a predetermined density.

31. The method of claim 11, wherein said density adjustment step further includes the steps of:

20 dissolving said bioerodible polymer in a solvent to form a polymer solution; and

precipitating said bioerodible polymer from said polymer solution in a liquid which is miscible with said solvent but in which said bioerodible polymer is insoluble to form a precipitate of a predetermined density.

25 32. The method of claim 1, further including the step of extruding the density-adjusted bioerodible polymer loaded with medicament into a rod using a predetermined temperature and pressure.

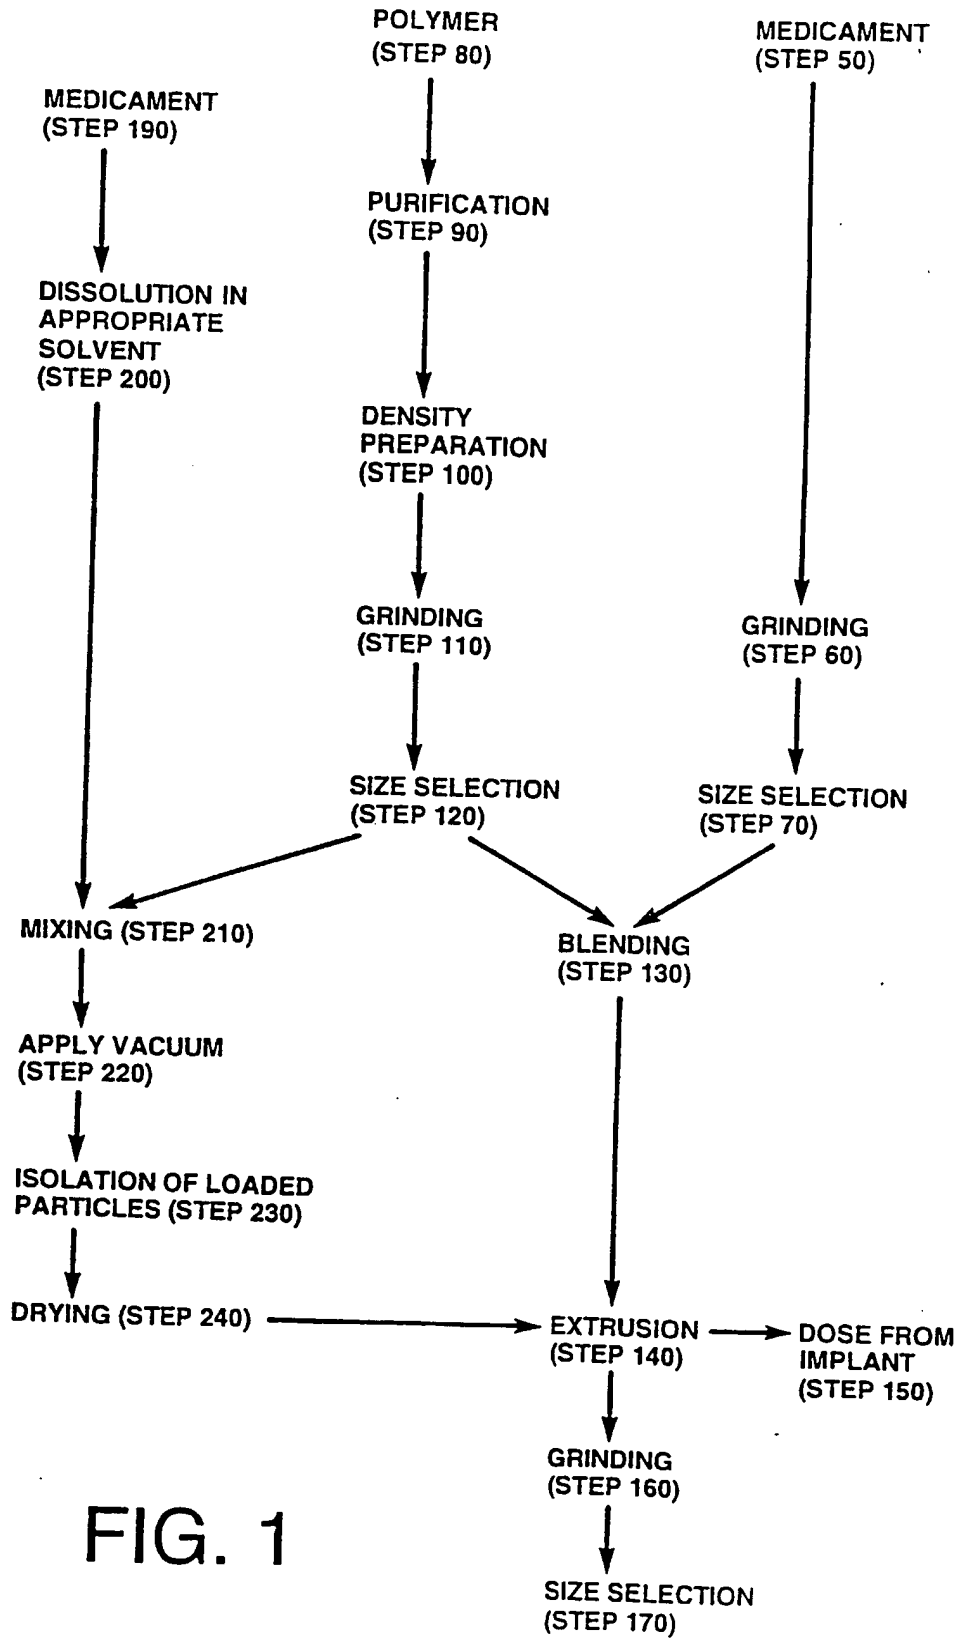
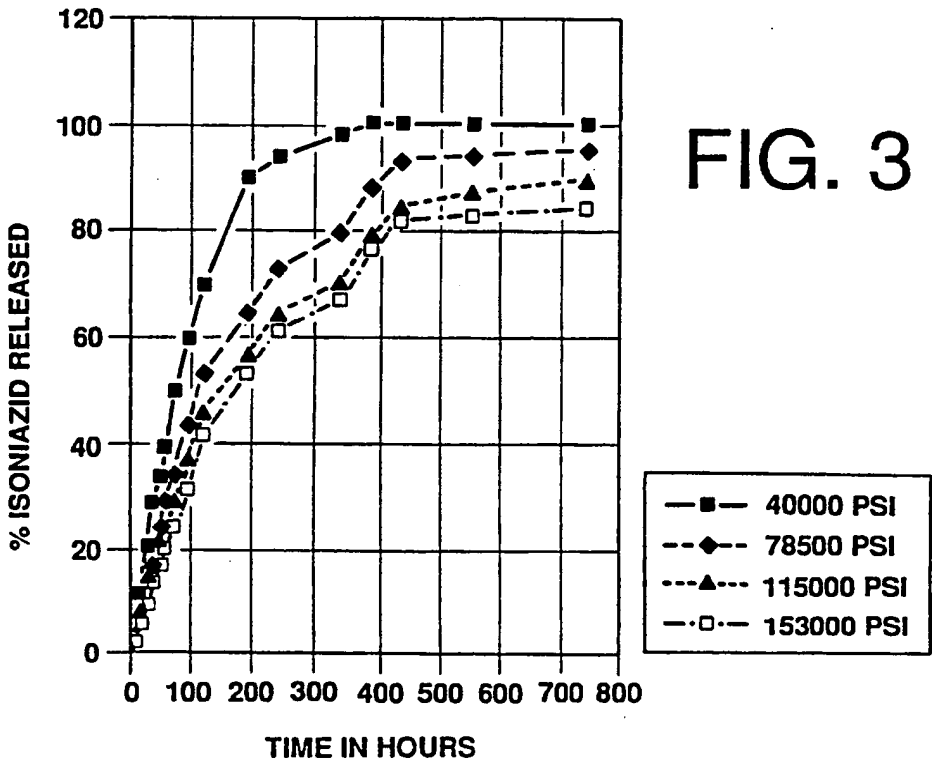
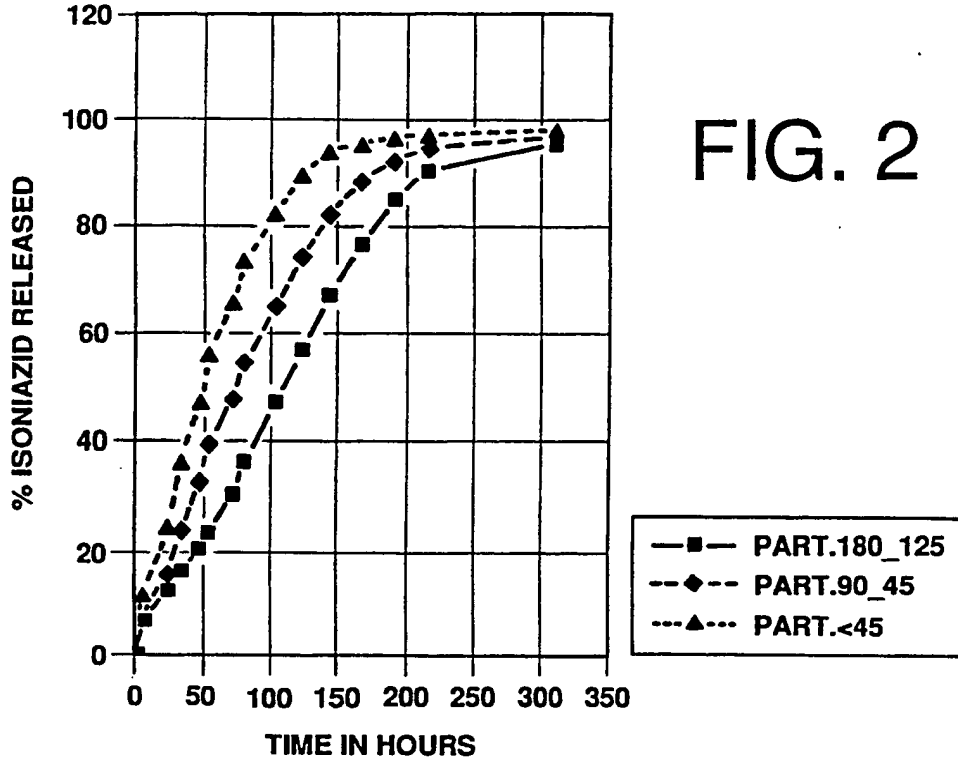


FIG. 1





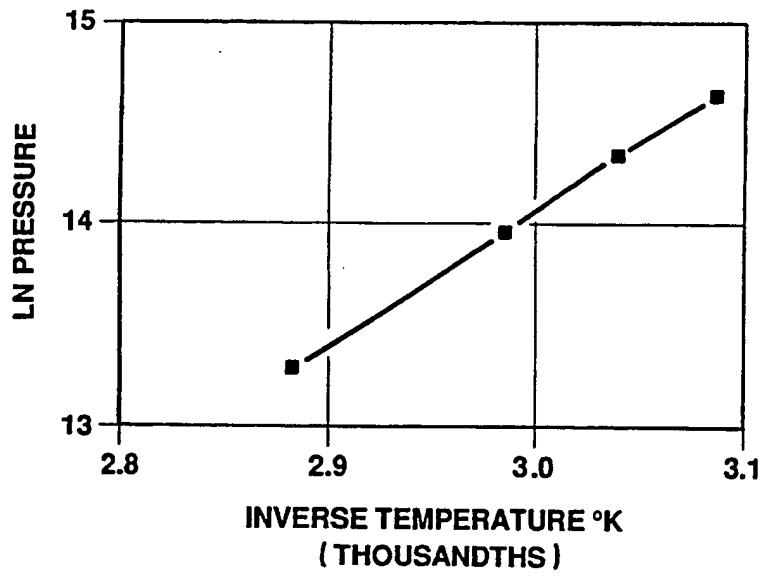


FIG. 4

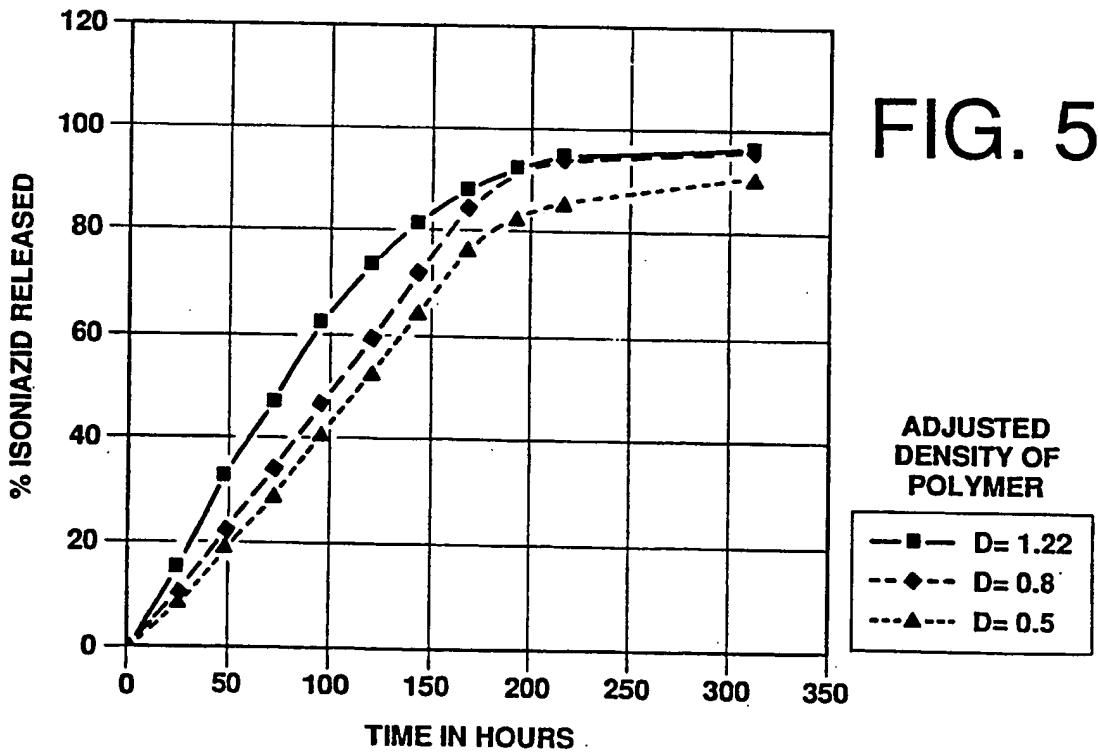


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US94/03710

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(5) :A61K 9/14, 9/52  
US CL :424/489, 501, 426, 473  
According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
U.S. : 424/489, 501, 426, 473

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
APS: "BIOERODIBLE" "DENSITY"

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,818,542 (DeLUCA ET AL) 04 April 1989, see entire document.	1-27
Y	US, A, 4,450,150 (SIDMAN) 22 May 1984, see entire document.	1-27
Y	US, A, 3,887,699 (YOLLES) 03 June 1975, see entire document.	1-27
Y	US, A, 4,623,588 (NUWAYSER ET AL) 18 November 1986, see entire document.	1-27
Y	US, A, 4,975,280 (SCHACHT ET AL) 04 December 1990, see entire document.	1-27

Further documents are listed in the continuation of Box C.  See patent family annex.

Special categories of cited documents:	
*A* document defining the general state of the art which is not considered to be part of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*E* earlier document published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*O* document referring to an oral disclosure, use, exhibition or other means	*G* document member of the same patent family
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 29 JUNE 1994	Date of mailing of the international search report 27 JUL 1994
---	---

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Authorized officer

PETER KULKOSKY

Facsimile No. (703) 305-3230

Telephone No. (703) 308-2351